


Wire and Tube Thermocouples

Washer Thermocouple

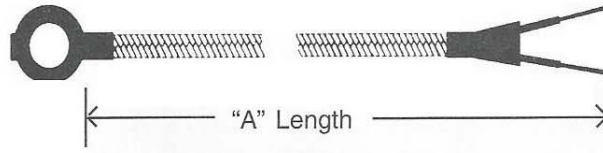

WT- - - X -

Calibration*	
Iron Constantan	J
Chromel Alumel	K
Chromel Constantan	E
Copper Constantan	T

*For additional calibrations call sales

Screw Size	
No. 8 (4mm)	8
No. 10 (4mm)	10
1/4" (6mm)	14

Insulation*	
Glass (900°F)	GG
PFA Teflon (500°F)	TT
High Temp Glass (1300°F)	HH
Kapton (600°F)	KK
Glass w/SS Braid	SB

*For insulation descriptions and special insulations, see page 3.

Termination*	
MCL	Mini Male (400F) \$5.50
MCH	Mini Hi-Temp Male (800F) \$7.00
MFL	Mini Female (400F) \$5.50
MFH	Mini Hi-Temp Female (800F) \$7.00
SCL	Standard Male (400F) \$5.50
SCH	Stand. Hi-Temp Male (800F) \$7.00
SFL	Standard Female (400F) \$6.00
SFH	Stand. Hi-Temp Female (800F) \$10
SPL	Spade Lugs \$3.50
STR	3/4" Stripped leads N/C

"A" Length
Specify in inches

Washer Dimensions			
Size	I.D	O.D.	Lgth.
No. 8	11/64"	5/16"	9/16
No. 10	3/16"	3/8"	11/16"
1/4"	17/64"	9/16"	15/16"

Washer Thermocouples are made with "Special Limits" wire. No. 8 has 24 gauge wire, No. 10 & 1/4" have 20 gauge wire.

Example: WT-K-8-TT X 24-MCL = \$13.25

Discount Schedule	
1 - 24 units	Net
25 - 49 units	10%
50 - 99 units	15%
100 and up	20%

Insulation	Prices (Includes first foot)
Glass	GG 7.00 + .50 / Foot + termination
PFA Teflon	TT 7.00 + .75 / Foot + termination
High Temp Glass	HH 7.00 + .75 / Foot + termination
Kapton	KK 8.00 + .95 / Foot + termination
Glass w/SS Braid	SB 8.00 + .95 / Foot + termination